




O-RINGS

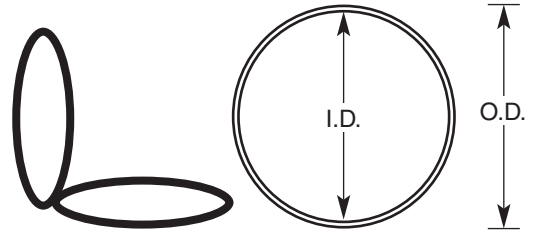

AN6227B, AN6230B, MS28775

The same compound is used for all three part numbers. For use in aircraft hydraulic systems using MIL-H-5606 petroleum base hydraulic fluid at -65°F to +160°F.

I.D.	O.D.	W.	AN6227B Meets MIL-P5516B	Same As	MS28775 Meets MIL-P-25732
1/8	1/4	1/16	AN6227B-1		MS28775-006
5/32	9/32	1/16	AN6227B-2		MS28775-007
3/16	5/16	1/16	AN6227B-3		MS28775-008
7/32	11/32	1/16	AN6227B-4		MS28775-009
1/4	3/8	1/16	AN6227B-5		MS28775-010
5/16	7/16	1/16	AN6227B-6		MS28775-011
3/8	1/2	1/16	AN6227B-7		MS28775-012
3/8	9/16	3/32	AN6227B-8		MS28775-110
7/16	5/8	3/32	AN6227B-9		MS28775-111
1/2	11/16	3/32	AN6227B-10		MS28775-112
9/16	3/4	3/32	AN6227B-11		MS28775-113
5/8	13/16	3/32	AN6227B-12		MS28775-114
11/16	7/8	3/32	AN6227B-13		MS28775-115
3/4	15/16	3/32	AN6227B-14		MS28775-116
3/4	1	1/8	AN6227B-15		MS28775-210
13/16	1-1/16	1/8	AN6227B-16		MS28775-211
7/8	1-1/8	1/8	AN6227B-17		MS28775-212
15/16	1-13/16	1/8	AN6227B-18		MS28775-213
1	1-1/4	1/8	AN6227B-19		MS28775-214
1-1/16	1-5/16	1/8	AN6227B-20		MS28775-215
1-1/8	1-3/8	1/8	AN6227B-21		MS28775-216
1-3/16	1-7/16	1/8	AN6227B-22		MS28775-217
1-1/4	1-1/2	1/8	AN6227B-23		MS28775-218
1-5/16	1-9/16	1/8	AN6227B-24		MS28775-219
1-3/8	1-5/8	1/8	AN6227B-25		MS28775-220
1-7/16	1-11/16	1/8	AN6227B-26		MS28775-221
1-1/2	1-3/4	1/8	AN6227B-27		MS28775-222
1-1/2	1-7/8	3/16	AN6227B-28		MS28775-325
1-5/8	2	3/16	AN6227B-29		MS28775-326
1-3/4	2-1/8	3/16	AN6227B-30		MS28775-327
1-7/8	2-1/4	3/16	AN6227B-31		MS28775-328
2	2-3/8	3/16	AN6227B-32		MS28775-329
2-1/8	2-1/2	3/16	AN6227B-33		MS28775-330
2-1/4	2-5/8	3/16	AN6227B-34		MS28775-331
2-3/8	2-3/4	3/16	AN6227B-35		MS28775-332
2-1/2	2-7/8	3/16	AN6227B-36		MS28775-333
2-5/8	3	3/16	AN6227B-37		MS28775-334
2-7/8	3-1/4	3/16	AN6227B-39		MS28775-336
3-1/8	3-1/2	3/16	AN6227B-41		MS28775-338
3-1/4	3-5/8	3/16	AN6227B-42		MS28775-339
3-3/8	3-3/4	3/16	AN6227B-43		MS28775-340
3-1/2	3-7/8	3/16	AN6227B-44		MS28775-341
3-5/8	4	3/16	AN6227B-45		MS28775-342
3-3/4	4-1/8	3/16	AN6227B-46		MS28775-343
3-7/8	4-1/4	3/16	AN6227B-47		MS28775-344
4	4-3/8	3/16	AN6227B-48		MS28775-345
4-1/8	4-1/2	3/16	AN6227B-49		MS28775-346
4-1/4	4-5/8	3/16	AN6227B-50		MS28775-347

I.D.	O.D.	W.	AN6230B Meets MIL-P5516B	Same As	MS28775 Meets MIL-P-25732
1-5/8	1-7/8	1/8	AN6230B-1		MS28775-223
1-3/4	2	1/8	AN6230B-2		MS28775-224
1-7/8	2-1/8	1/8	AN6230B-3		MS28775-225
2	2-1/4	1/8	AN6230B-4		MS28775-226
2-1/8	2-3/8	1/8	AN6230B-5		MS28775-227
2-1/4	2-1/2	1/8	AN6230B-6		MS28775-228
2-3/8	2-5/8	1/8	AN6230B-7		MS28775-229
2-1/2	2-3/4	1/8	AN6230B-8		MS28775-230
2-5/8	2-7/8	1/8	AN6230B-9		MS28775-231
2-3/4	3	1/8	AN6230B-10		MS28775-232
2-7/8	3-1/8	1/8	AN6230B-11		MS28775-233
3	3-1/4	1/8	AN6230B-12		MS28775-234
3-1/8	3-3/8	1/8	AN6230B-13		MS28775-235
3-1/4	3-1/2	1/8	AN6230B-14		MS28775-236
3-3/8	3-5/8	1/8	AN6230B-15		MS28775-237
3-1/2	3-3/4	1/8	AN6230B-16		MS28775-238
3-5/8	3-7/8	1/8	AN6230B-17		MS28775-239
3-3/4	4	1/8	AN6230B-18		MS28775-240
3-7/8	4-1/8	1/8	AN6230B-19		MS28775-241
4	4-1/4	1/8	AN6230B-20		MS28775-242
4-1/8	4-3/8	1/8	AN6230B-21		MS28775-243
4-1/4	4-1/2	1/8	AN6230B-22		MS28775-244
4-3/8	4-5/8	1/8	AN6230B-23		MS28775-245
4-1/2	4-3/4	1/8	AN6230B-24		MS28775-246
4-5/8	4-7/8	1/8	AN6230B-25		MS28775-247

O-Rings Fuel Resistant MS29513

For use with hydrocarbon fuels MIL-F-5572, MIL-F-5616 and MIL-F-5624 at temperatures from -65°F to +200°F.

MS29513 Dash No.	I.D. (In)	O.D. (In)	W (In)	MS29513 Dash No.	I.D. (In)	O.D. (In)	W (In)
-006	.114	.254	.070	-020	.864	1.004	.070
-008	.176	.316	.070	-111	.424	.630	.103
-010	.239	.379	.070	-138	2.112	2.318	.103
-011	.301	.441	.070	-155	3.987	4.193	.103
-012	.364	.504	.070	-232	2.734	3.012	.139
-013	.426	.566	.070	-238	3.484	3.762	.139
-014	.489	.629	.070	-338	3.100	3.520	.210
-015	.551	.691	.070				
-018	.739	.879	.070				

Tube Fitting/Boss Gasket/ O-Ring MS28778

Supersedes AN6290



MS28778 Dash No.	Old AN6290 Dash No.	Tube O.D. Nominal	I.D. (In)	W (In)
-2	-2	1/8	.239	.064
-3	-3	3/16	.301	.064
-4	-4	1/4	.351	.072
-5	-5	5/16	.414	.072
-6	-6	3/8	.468	.078
-8	-8	1/2	.644	.087
-10	-10	5/8	.755	.097
-12	-12	3/4	.924	.116

AN901 Gaskets

Tube connection seals made of aluminum alloy. Order according to the tube size of the fittings with which the gasket is used.

Dash Number	Tube O.D. (Inches)
-4A	1/4
-5A	5/16
-6A	3/8
-8A	1/2
-10A	5/8
-12A	3/4
-16A	1



AN900 Gaskets

Annular copper asbestos gaskets. Ring width is 1/8"; thickness is 3/32".

Part Number	I.D. (Inches)	Alternative Part No.	Part Number	I.D. (Inches)	Alternative Part No.
AN900-4	1/4	MS35769-2	-15	15/16	-20
-5	5/16		-16	1	-21
-6	3/8		-17	1-1/16	-24
-7	7/16		-18	1-1/8	-26
-8	1/2		-20	1-1/4	-31
-9	9/16		-21	1-5/16	-33
-10	5/8		-22	1-3/8	-35
-11	11/16		-24	1-1/2	-39
-12	3/4		-26	1-3/4	-42
-13	13/16		-29	1-13/16	-51
-14	7/8		-30	1-7/8	-52

© 2005 Trimcraft Aviation