




AERODUCT-SCAT

“AERO DUCT” types meet applicable FAA and military specifications.

SILICONE IMPREGNATION (Stocked in 11 foot lengths).

SCAT-1 ply same as **CAT** except with silicone rubber impregnation. From -80 degrees F to over 450 degrees F. Aircraft and industrial type.

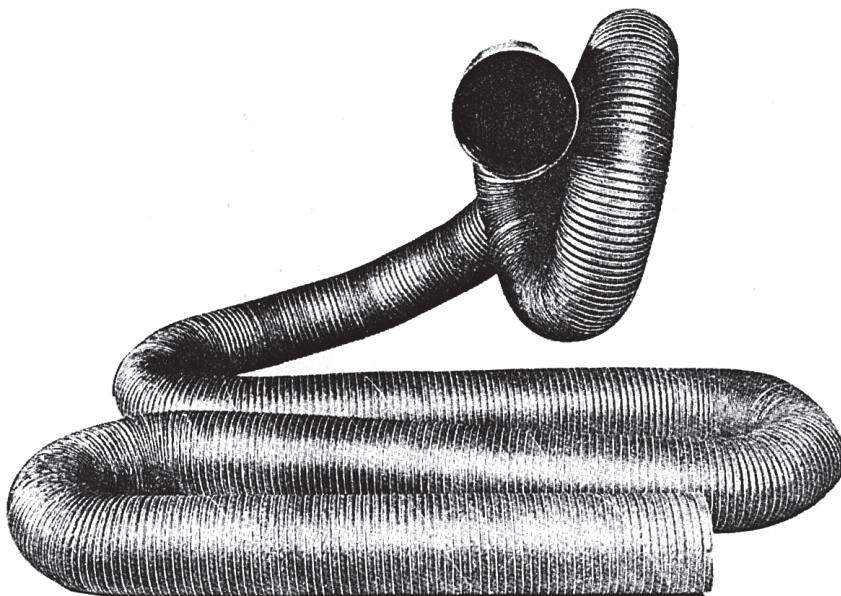

AVAILABLE in 5-1/2' Half Lengths or 11' Standard Length

SCAT	Diameter (Inches)
3	3/4
3A	7/8
4	1
5	1-1/4
6	1-1/2
7	1-3/4
8	2
9	2-1/4
10	2-1/2
11	2-3/4

SCAT	Diameter (Inches)
12	3
13	3-1/4
14	3-1/2
15	3-3/4
16	4
18	4-1/2
20	5
24	6

SCAT	Inches Diameter	
2	1/2	5' Length Only
2A	5/8	5' Length Only



MIL-H-6000 B HOSE

Designed to handle oil, alcohol, coolant, fuel and water in all aircraft engine installations. Constructed of an oil resistant tube, reinforced with one braid of high strength mildew resistant yarn. Covered overall with a rugged oil and ozone resistant rubber compound. Ideal for severe engine compartment applications. Minimum Burst: 1000 PSI on hose sizes 1/4" through 1".

1/2 Length (5') and Full Length (10') Available in the following sizes:			
1/4" I.D.	3/8" I.D.	5/8" I.D.	7/8" I.D.
5/16" I.D.	1/2" I.D.	3/4" I.D.	1" I.D.

© 2005 Trimcraft Aviation